

CSS/DSS/FSS CSSF/DSSF/FSSF

Stainless Steel Self-Priming Centrifugal Pump Series

Features



- Maximum ambient temperature: +60°C
- Pump body: stainless steel
- Impeller: stainless steel
- Mechanical seal: Italy original imported BT single-face mechanical seal
- SUS-304 stainless steel for motor housing, motor shaft and screws
- Vertical switch for models-CSSF, DSSF and FSSF

Motor Features

- Single phase
- Closed externally ventilated
- Insulation class: E
- Protection class: IP68
- Duty: continuously rated
- Current protector and terminal protector

Application

- Suitable for clean water and salt water
- Water supply and disposal, water circulation and water change for crop farming, forestry and fishery use.

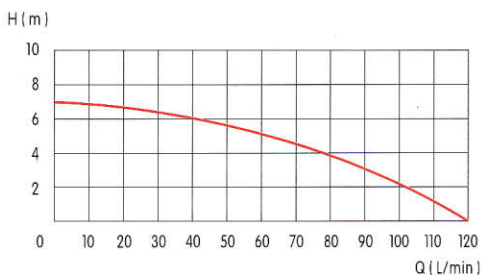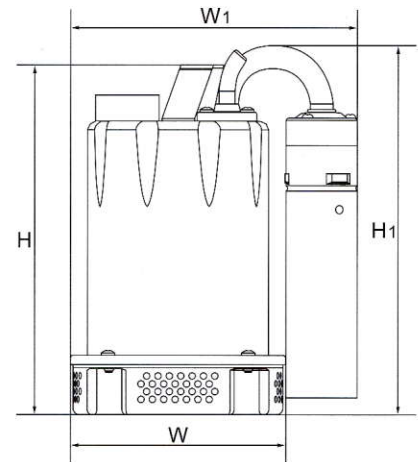

CSSF-250

CSS-250

Model	Power		Caliber	Phase	Polarity	Voltage	Ampere	Capacitor	Capacity	Head	Length	Width	Height	Weight
	HP	KW												
CSS-250	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	15	15	25.5	4.9
CSSF-250	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	20.5	15	26	5.3
DSS-250	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	15	15	25.5	4.9
DSSF-250	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	20.5	15	26	5.3
FSS-250	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	15	15	25.5	4.7
FSSF-250	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	20.5	15	26	5.1
FSS-250D	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	15	15	25.5	4.7
FSSF-250D	0.34	0.25	1.5"	1	2	230V	2	2.5	118	7	20.5	15	26	5.1