


TECHNICAL SHEET
Kit Batteria 40l 12/24V
KPT 40l 12/24V
PTP 40l 12/24V
CC pump



Flow Range

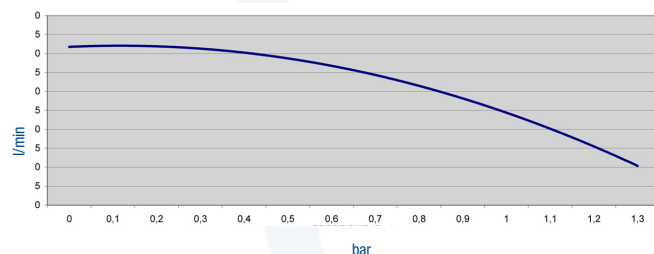

FEATURES

Voltage [V]	CC
Current-max [A]	21 / 15
Motor weather protection rating	IP 55
On/Off Switch	yes
Length of cable [m]	2
Fuse in cable [A]	30
Duty Cycle [min]	S2 30
Flow rate-max [l/min]	40
Pressure-Max [bar]	1.3
Vacuum, dry height [m]	2
Built in Bypass valve	yes
Pump Inlet Port [BSPP]	3/4"
Pump Outlet Port [BSPP]	3/4"
Material, pump housing	cast iron
Material rotor	steel sint.
Material vanes	POM
Material Shaft seal	HNBR
Material other seal	NBR
Built in Filter	no
Suction hose [material,Ø,m,fitting]	PVC, 20 , 2
Discharge hose [material,Ø,m,fitting]	rubber, 20, 4, 3/4"x1"
Pump mounting feet on motor	yes
Operating Temperature min/max [°C]	-20/+50
Fluid Viscosity max	diesel fuel
Approved fluids	diesel
Forbidden fluids	gas, alcohol, water
Sound Level, max from 1 meter [dB]	75
Net weight of pump only [kg]	6.6
Gross weight of shipping package [kg]	7.2

ACCESSORIES Kit Batteria

- manual nozzle
- automatic nozzle
- hose lenght
- cable lenght

Kit Batteria

Voltage [V]	12 / 24
Current-max [A]	21 / 15
Motor weather protection rating	IP 55
On/Off Switch	yes
Length of cable [m]	2
Fuse in cable [A]	30
Duty Cycle [min]	S2 30
Flow rate-max [l/min]	40
Pressure-Max [bar]	1.3
Vacuum, dry height [m]	2
Built in Bypass valve	yes
Pump Inlet Port [BSPP]	3/4"
Pump Outlet Port [BSPP]	3/4"
Material, pump housing	cast iron
Material rotor	steel sint.
Material vanes	POM
Material Shaft seal	HNBR
Material other seal	NBR
Built in Filter	no
Suction hose [material,Ø,m,fitting]	PVC, 20 , 2
Discharge hose [material,Ø,m,fitting]	rubber, 20, 4, 3/4"x1"
Pump mounting feet on motor	yes
Operating Temperature min/max [°C]	-20/+50
Fluid Viscosity max	diesel fuel
Approved fluids	diesel
Forbidden fluids	gas, alcohol, water
Sound Level, max from 1 meter [dB]	75
Net weight of pump only [kg]	6.6
Gross weight of shipping package [kg]	7.2

KPT

- cable lenght
- filter

KPT

Voltage [V]	12 / 24
Current-max [A]	21 / 15
Motor weather protection rating	IP 55
On/Off Switch	yes
Length of cable [m]	2
Fuse in cable [A]	30
Duty Cycle [min]	S2 30
Flow rate-max [l/min]	40
Pressure-Max [bar]	1.3
Vacuum, dry height [m]	2
Built in Bypass valve	yes
Pump Inlet Port [BSPP]	3/4"
Pump Outlet Port [BSPP]	3/4"
Material, pump housing	cast iron
Material rotor	steel sint.
Material vanes	POM
Material Shaft seal	HNBR
Material other seal	NBR
Built in Filter	no
Suction hose [material,Ø,m,fitting]	no
Discharge hose [material,Ø,m,fitting]	no
Pump mounting feet on motor	yes
Operating Temperature min/max [°C]	-20/+50
Fluid Viscosity max	diesel fuel
Approved fluids	diesel
Forbidden fluids	gas, alcohol, water
Sound Level, max from 1 meter [dB]	75
Net weight of pump only [kg]	3.6
Gross weight of shipping package [kg]	3.9

PTP

- manual nozzle
- automatic nozzle
- hose lenght
- cable lenghtt

PTP

Voltage [V]	12 / 24
Current-max [A]	21 / 15
Motor weather protection rating	IP 55
On/Off Switch	yes
Length of cable [m]	2
Fuse in cable [A]	30
Duty Cycle [min]	S2 30
Flow rate-max [l/min]	40
Pressure-Max [bar]	1.3
Vacuum, dry height [m]	2
Built in Bypass valve	yes
Pump Inlet Port [BSPP]	3/4"
Pump Outlet Port [BSPP]	3/4"
Material, pump housing	cast iron
Material rotor	steel sint.
Material vanes	POM
Material Shaft seal	HNBR
Material other seal	NBR
Built in Filter	no
Suction hose [material,Ø,m,fitting]	telescopic, 20 , 4, 3/4"x1"
Discharge hose [material,Ø,m,fitting]	rubber, 20, 4, 3/4"x1"
Pump mounting feet on motor	yes
Operating Temperature min/max [°C]	-20/+50
Fluid Viscosity max	diesel fuel
Approved fluids	diesel
Forbidden fluids	gas, alcohol, water
Sound Level, max from 1 meter [dB]	75
Net weight of pump only [kg]	7.7
Gross weight of shipping package [kg]	8.6