

TECHNICAL SHEET


WALL TECH 40/45/60

CC pump 12/24V



FEATURES	40I 12V - 24V		45I 12V - 24V		60I 12V - 24V	
Voltage [V] CC	12	24	12	24V	12	24
Current-max [A]	21	13	24	9 A	28	18
Motor weather protection rating	IP 55		IP 55		IP 55	
On/Off Switch	yes		yes		yes	
Length of cable [m]	2		2		2	
Fuse in cable [A]	30	15	30	15 A	40	40
Duty Cycle [min]	S2 30		S2 30		S2 30	
Flow rate-max [l/min]	40		45		60	
Pressure-Max [bar]	1.3		1.3		2	
Vacuum, dry height [m]	2		2		2	
Built in Bypass valve	yes		yes		yes	
Pump Inlet Port [BSPP]	1"		1"		1"	
Pump Outlet Port [BSPP]	1"		1"		1"	
Material, pump housing	ghisa		ghisa		ghisa	
Material rotor	acciaio sint.		acciaio sint.		acciaio sint.	
Material vanes	POM		POM		POM	
Material Shaft seal	HNBR		HNBR		HNBR	
Material other seal	NBR		NBR		NBR	
Built in Filter	yes		yes		yes	
Discharge hose [material,Ø,m,fitting]	rubber, 20, 4, 3/4"x1"		rubber, 20, 4, 3/4"x1"		rubber, 20, 4, 3/4"x1"	
Pump mounting feet on motor	yes		yes		yes	
Operating Temperature min/max [°C]	-20/+50		-20/+50		-20/+50	
Fluid Viscosity max	diesel fuel		diesel fuel		diesel fuel	
Approved fluids	diesel		diesel		diesel	
Forbidden fluids	gas, alcohol, water		gas, alcohol, water		gas, alcohol, water	
Sound Level, max from 1 meter [dB]	75		75		75	
Net weight of pump only [kg]	10.5		12		15	
Gross weight of shipping package [kg]	11.5		13		16	

Flow Range

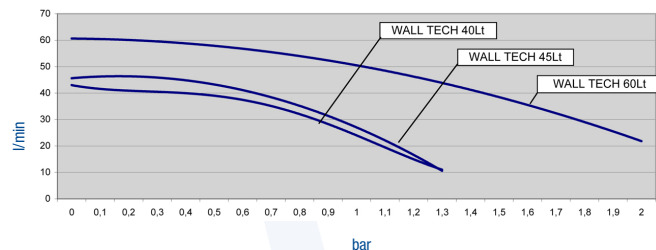

ACCESSORIES

- manual nozzle
- automatic nozzle
- add-on Kit Filter
- customizable faceplate meter